



Floor Model Refrigerated Square Display Cases

Standard Features

- Stainless steel exterior & interior
- Full electronic digital controller
- Two (2) stainless steel adjustable shelves standard
- LED interior lighting on each shelf and top of cabinet
- Double pane tempered glass with front defog feature
- Rear mount compressor with environmentally friendly R-290 refrigerant
- Maintains temperatures between 33 °F - 38 °F
- 2" casters standard
- Magnetic door gasket(s) standard for a positive door seal
- Two (2) rear sliding doors
- NEMA 5-15P plug standard
- Optional extended parts and labor warranty up to 5 years

MODELS:

RDCS-48



RDCS-48

For the best results of food preservation we recommend setting your refrigerator between 33 °F to 38 °F

1. Don't forget to leave the unit some room to breathe!
2. Please clean the condenser frequently to give the unit more fresh air.



2 YEAR PARTS AND LABOR WARRANTY (US ONLY)
 5 YEAR COMPRESSOR PART WARRANTY (US ONLY)





“WE MAKE THE KITCHEN BETTER!”




Toll Free: 855-855-0399 Email: info@atosausa.com
www.atosa.com | www.atosausa.com
California, Colorado, Florida, Georgia, Illinois,
New Jersey, Ohio, Texas, Washington

SPECIFICATIONS

Models	Door	Capacity (Cu.Ft.)	Shelves	Casters (inch)	Amps (A)	Voltage (V/Hz/Ph)	HP	Refrigerant	Exterior Dimensions (inch)	Net Weight (lbs)	Gross Weight (lbs)
RDCS-48	2	15.1	2	2	6.2	120/60/1	1/4	R290	47 ^{1/5} ×29 ^{1/2} ×47 ^{4/5}	454	573

PLAN VIEW

RDCS-48

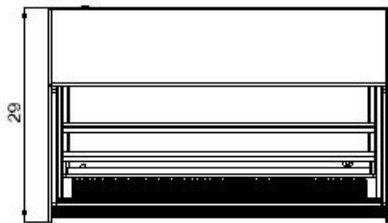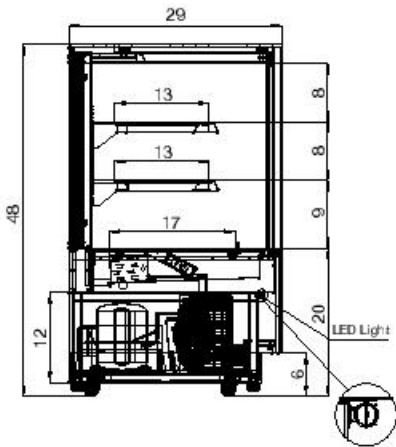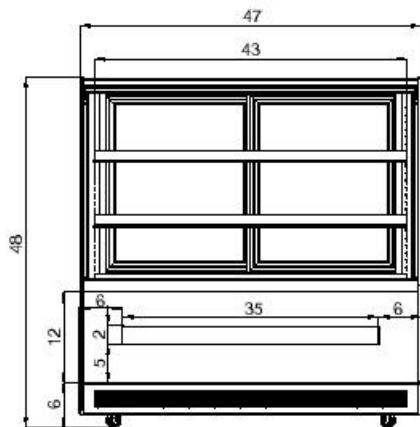

NEMA 5-15P



NEMA
15A/125V