

Electric Steam Tables

Standard Features

- Fully insulated open wells—all four sides and bottom of wells are insulated by fiberglass, 8" deep, dry heating style, open well design
- Temperature control—individual infinite switch controls each well
- Two type heat elements—500 watt per well and 750 watt per well
- Stainless steel die-stamped opening—12"x20", rising lip around well helps keep well clean and makes food pans easy to load and unload
- Poly cutting board—7" wide x 1/2" thick with 18 gauge stainless steel support shelf and brackets
- 18 gauge stainless steel top, body and under shelf
- Stainless steel tubular legs with adjustable stainless steel feet, giving tables a strong structure
- Indicator light of each well shows both power on and element heating
- Mechanical guards on all switches for safety and reliability
- Standard with water pans

Optional Accessories

- Casters (set of 4) item # CSTEА-2-016
- Over shelf item # MROS-2ST/-3ST/-4ST/-5ST

MODELS:

CSTEА-3C



CSTEА-3C



MROS-3ST

44^{3/10} × 12^{1/5} × 16^{1/10}



1 YR WARRANTY ON ALL PARTS AND LABOR (US ONLY)






California 4008
S10281710-2009 0201 S
California 4008
S101801200901 S
California 4008 00010104



SPECIFICATIONS

Models	Voltage (V)	Wells	Watts/Well (W)	Total Watts	PH	Top Opening	Cu.ft.	Plug	Exterior Dimensions (inch)	Net Weight (lbs)	Gross Weight (lbs)
CSTEA-3C	120	3	500	1500	1	3	15.5	NEMA-5-15P	44 ^{1/2} ×29 ^{1/2} ×33 ^{1/2}	84	104

PLAN VIEW

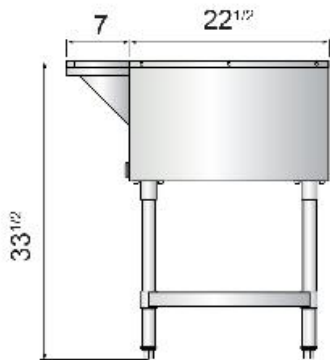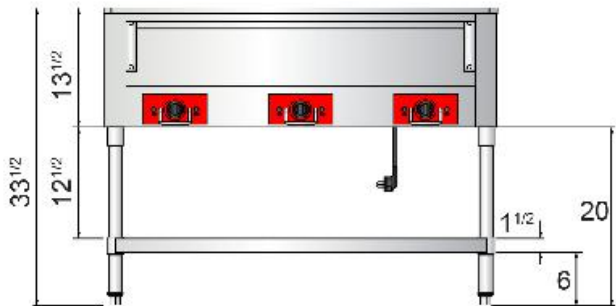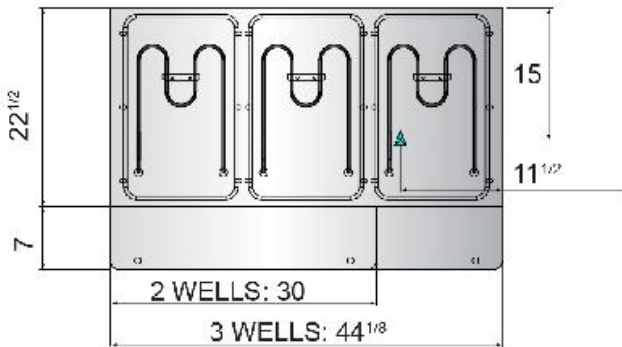

Fully insulated wells Stainless steel exterior Temperature control Stainless steel legs

